

**At Stonhard we've always solved flooring problems...
Now there's nothing we can't solve.**

In most applications Stonhard's trowel and fluid applied seamless floors answer the world's toughest flooring problems. However, there are some cases that require a different solution.

- When concrete is severely contaminated due to grease, oils or even asbestos
- When there is no time at all to prepare a floor
- When you need a portable floor


Stonlok flexible, interlocking tiles solve the problem, *instantly.*



Unparalleled products, comprehensive support and proven performance.

You're locked into experience -- more than 80 years manufacturing and installing floors, Stonhard offers the Stonlok product with the same commitment to product and service that has made Stonhard the global leader in floors.

Available in nine colors. Combine colors to enhance an area or create color-coded safety zones or designated traffic aisles.

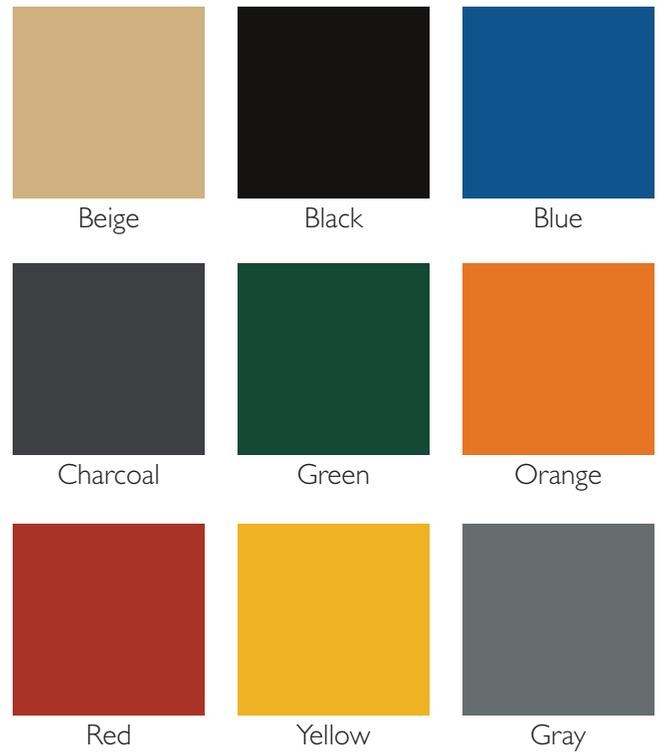

Color reproductions are as accurate as modern photography and quality printing methods can produce. For actual color see flooring sample.

STONLOK TECHNICAL DATA

Hardness, Shore A (ASTM D-2240)	85-90
Abrasion Resistance (ASTM D-3389), CS-17 wheels, 1000g, 1000 cycles	83mg loss
Slip Index, wet/dry (ASTM F-1679)	0.84/0.85
Static Load Limit (ASTM F-970), 125 lb.	0.001"
Tensile Properties (ASTM D-638)	Strength (psi) 2200 Elongation (%) 300

Stonlock floors are resistant to many chemicals, including:

- | | |
|-------------------------|--------------|
| Sodium Hydroxide (48%) | Methanol |
| Hydrochloric Acid (25%) | Propanol |
| Hydrogen Peroxide (30%) | Toluene |
| Sulfuric Acid (25%) | Oils & Salts |